

## NVR808E-32

### 32 Channel 2U 8HDD Network Video Recorders



#### Key Features:


- 32CH IP Video input, up to 12MP
- H.265+/H.265 dual-stream video compression
- Incoming/Outgoing Bandwidth: 256M/256M
- Playback: 16CH 1080P@30fps/8CH 4M@30fps/6CH 5M@30fps/4CH 4K@30fps
- Supports mainstream cameras of ONVIF and RTSP protocol
- HDMI 1/HDMI 2 asynchronous outputs, maximum resolution of HDMI is 4K
- AI by Camera: SMD, perimeter protection, face detection, etc.

#### ■ Specifications

<b>Video &amp; Audio Input</b>	
IP Video Input	32ch
Audio input	1ch, RCA
<b>Video &amp; Audio Output</b>	
HDMI	HDMI 1: 4K(3840×2160)/30Hz, 1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz HDMI 2: 1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz
VGA	1920×1080/60Hz, 1280×1024/60Hz, 1280×720/60Hz
Audio Output	2ch, RCA
<b>Recording</b>	
Compression	H.265+/H.265/H.264+/H.264
Resolution	12MP/8MP/5MP/4MP/3MP/1080P/720P/D1/CIF/QCIF
<b>Playback &amp; Backup</b>	
Playback Resolution	12MP/8MP/5MP/4MP/3MP/1080P/720P/D1/CIF/QCIF
Decoding Capability	2ch@12M 20fps 4ch@8M 30fps 6ch@5M 30fps 8ch@4M 30fps 16ch@1080P 30fps
Synchronous Playback	16ch
Playback Mode	Smart Playback/Normal/Time Division/Label/Event/Picture Playback
Backup Mode	USB Device/Network/eSATA
<b>Advanced Features</b>	
Smart Detection by Camera	Area Intrusion, Line crossing, Region Entrance /Region Exiting, Fast Moving, Object Missing, Unattended Object, Loitering Detection, Parking Detection, Face Detection, People Gathering Detection, Blurred detection, Scene change detection, Audio exception detection, SMD, PP
Smart Playback	Face detection/Line Crossing/Are Intrution/Motion Detection/Human Detection/Vehicle Detection
Cloud Storage	Support
Cloud Upgrade	Support
<b>Network</b>	
Incoming Bandwidth	320Mbps
Outgoing Bandwidth	256Mbps
Ethernet	2 x RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Network Compatibility	HTTPs, HTTP, TCP/IP, IPv4, UPnP, RTSP, UDP, SMTP, SNMP, Multicast, NTP, DHCP, DNS, IP Filter, DDNS, FTP, P2P, ONVIF
Smart Phone	IOS(iPhone, iPad), Android(Phone, Pad)
<b>Hard Disk</b>	
SATA	8 SATA interface
Capacity	Up to 18TB capacity for each HDD
<b>External Interface</b>	
USB Interface	Front panel: 2 × USB 2.0 Rear panel: 1 × USB 3.0
eSata	1 × eSATA
RS 485	2
Alarm In	16ch
Alarm Out	4ch
<b>General</b>	
Power Supply	AC 100~240V
Power Consumption	≤30W(without HDD)
Working Environment	14°F ~ 131°F(-10°C ~ 55°C) Humidity 10% to 90%
Dimension (W×D×H)	17.32" × 17.80" × 3.54", 2U (440 × 452 × 90mm)
Weight	7.9kg

## ■ Dimensions

- 1.Power Switch
- 2.Power Input
- 3.Ground
- 4.Alarm Input
- 5.HDMI port
- 6.eSATA port
- 7.VGA port
- 8.Audio IN/OUT RCA
- 9.USB port
- 10.Network port

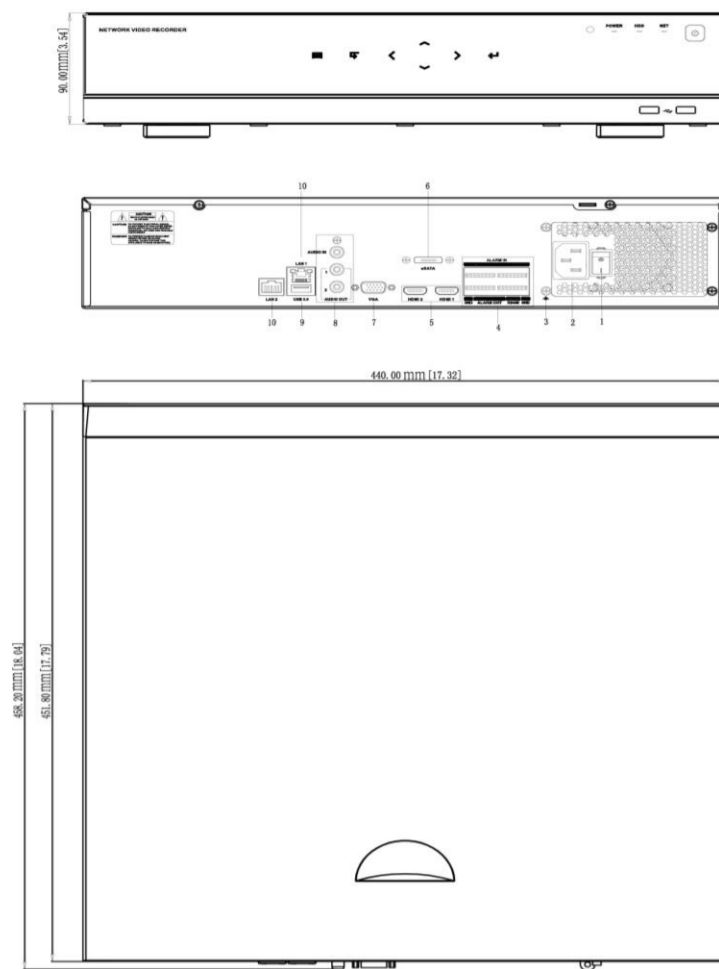

© Homaxi Inc. All rights reserved.

\*Product specifications are subject to change without notice.