

UVC6TF1U-CM

3K Full Color Audio Fixed Turret Camera



Key Features:

- 3K 2960 × 1665 High Quality Image Camera
- 24h Full Color Image with F1.0 Aperture
- D-WDR, 2DNR
- 2.8mm, 3.6mm Fixed lens
- 65ft(20m) white light distance
- Built-in Mic
- Water and dust resistant (IP67)
- 4 in 1 (4 signals switchable TVI/AHD/CVI/CVBS)

■ Specifications

Camera	
Image Sensor	1/2.7" CMOS Sensor
Signal System	PAL/NTSC
Effective Pixels	2560 (H) × 1665 (V)
Electronic Shutter	AUTO/ 1/50(1/60)-1/50,000sec
Min. Illumination	0.01 Lux@(F1.2, AGC ON), 0 Lux with IR
Video Frame Rate	PAL/NTSC: 5MP@20fps
Video Output	AHD/TVI/CVI/CVBS
Mic	Support(only in TVI mode)
Camera Features	
S/N Ratio	≥50dB
Noise Reduction	2D DNR
Day&Night	Full Color
White Balance	ATW/Manual
WDR	D-WDR
LED	2pcs Warm Light
Warm Light Range	65ft(20m)
Lens	
Focal Length	2.8mm/3.6mm F1.0Fixed Lens
Angle of View	2.8mm: Horizontal FOV: 110°, Vertical FOV: 60°, Diagonal FOV: 126° 3.6mm: Horizontal FOV:90°, Vertical FOV: 50°, Diagonal FOV: 103°
Lens Type	Fixed Iris
Mount Type	M12
General	
IP Rating	IP67

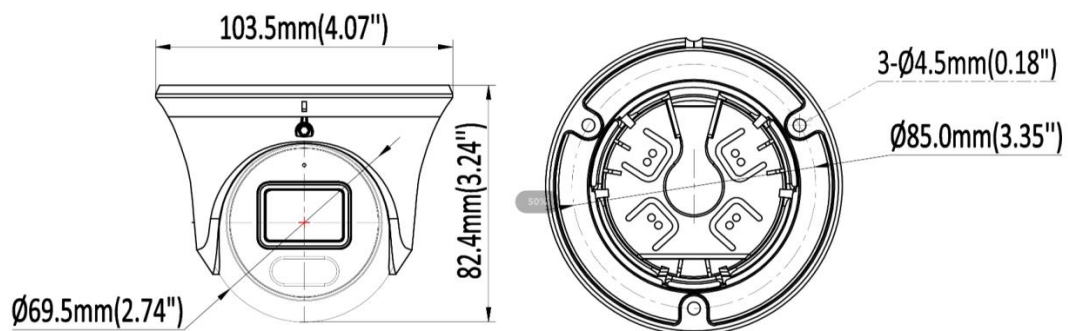
Housing Material	Metal
Power Supply	DC12V (±10%)
Power Consumption	<8W
Working Temperature / Humidity	-40°F ~ 140°F (-40°C ~ 60°C) Humidity 95% or less (non-condensing)
Dimensions	Φ4.07" × 3.24" (103.5 × 82.4 mm)
Weight	350g

■ Available Models





UVC6TF1U-CM (2.8mm)

UVC6TF1U-CM (3.6mm)

■ Dimensions



■ Related Accessories

Junction Box, 145 × 145 × 53.5MM, LB01	Junction Box, non-waterproof, Φ 102 × 40MM, LB02	Junction Box, Φ 112.5 × 49.5MM, AC-JB02
		
Junction Box, Φ 120 × 105.8 × 183.5MM, AC-WM02		
		

©Homaxi Inc. All rights reserved.

*Product specifications are subject to change without notice.